

## Product information

# 95 62 160 SB

## Wire Rope Cutter

Also for high-strength wire rope



- Specially optimised for precise cutting of tyre cord, wire ropes up to Ø 2 mm and cables up to Ø 2 mm
- Ergonomic thanks to lightweight design and practical opening restriction
- Compact size, low weight, high performance level
- Made for intensive use: particularly durable and light at only 175 g
- For wire rope with Ø 4.00 / 1960 Nmm<sup>2</sup>
- Up to 30 % less physical effort compared to wire rope cutters of the same length
- Double-mounted box joint design for high level of stability
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 62 HRC
- Convenient work thanks to opening spring
- Secured by locking device during transport

MM


General	
Article No.	95 62 160 SB
EAN	4003773082712
Shears	burnished
Head	burnished
Handles	with multi-component grips
Weight	195 g
Dimensions	160 x 85 x 26 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details	
Cutting capacity copper cable, multiple-stranded (diameter)	Ø 6.0 mm
Cutting capacities wire rope (diameter)	Ø 4.0 mm

*technical change and errors excepted*



Compact at 160 mm but nevertheless more powerful than many larger wire rope cutters

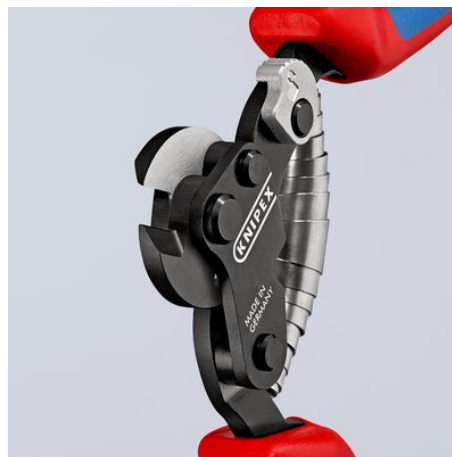

Double-bearing joint



Cutting of high-strength wire ropes (1960 N/mm<sup>2</sup>) of up to Ø 4 mm